

HD Decoder

Technical Specifications



Dimensions and Weight

Height: 1.46 inches
Depth: 3.8 inches

Width: 4.02 inches
Weight: .66 pounds

Internal Specs

Video Codecs: MPEG-2 MP@HL; MPEG-4 Part 10 AVC/H.264 HP@L4

Video Resolutions: Up to 1080i and 720p

Audio Decoding: Analog stereo audio out; stereo via S-PDIF and HDMI; Dolby

Memory: 128MB Flash, 256MB RAM


Power Supply: 5V DC at 1.5A via external power supply, less than 8 W typical usage — accepts 100-240VAC @ 50-60Hz 3A max

Operating Temperature: 0°C (32°F) to 40°C (104°F)

Operating Environment: ETS 300-019-1-3 Class 3.1

Product Safety: CAN/CSA-C22.2 No. 60950-1-03 EN60950

Compliance: FCC Part 15 class B. 2004/108/EC EN55022

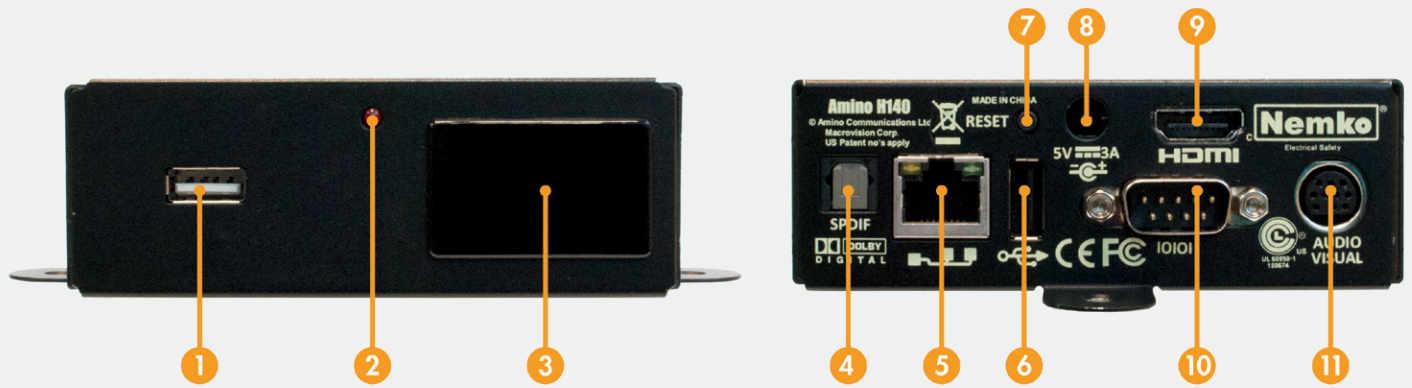

Front Panel

- 1 **USB Port:** Attaches to a keyboard for configuring the decoder's network and device settings.
 - 2 **Status LED:** 1 light emitting diode (LED) provides status on power and reception of remote control infrared (IR) commands.
 - 3 **IR Sensor:** Receives IR commands from the decoder's remote control.
-

Back Panel

- 4 **S/PDIF Output:** Reserved for future use.
 - 5 **Ethernet Port:** 10/100 BASE-T via RJ-45 shielded connector
 - 6 **USB Port:** Reserved for future use.
 - 7 **Reset Button:** Returns decoder to factory settings.
 - 8 **Power Connector**
 - 9 **HDMI Output:** 1.3a with HDCP and CEC
 - 10 **Serial Port:** Reserved for future use.
 - 11 **Analog Audio/Video Output:** 10-way Mini-DIN for composite video, component (YPrPb), RGB, S-Video, and analog audio.
-